



Automatización Eléctrica
Especialistas en Automatización

At the end of this document you will find links to products related to this catalog. You can go directly to our shop by clicking HERE. [HERE](#)

Data sheet

Display

EKA 163 / EKA 164



Application

The displays may be used in conjunction with some of the controllers in the AK- and EKC series, e.g. AK-CC, AK-PC, EKC 414, EKC 514.

EKA 163 has no operating buttons and can be mounted on the refrigeration appliance in such a way that the customer can see the temperature at the goods.

EKA 164 has operating buttons so that settings can be made in the controller's menu system.


There are 2 types: type A and type B.

Type A has a stronger communication circuit that covers both RS 485 and TTL.

Type A can be used instead of type B.


Do not use type B when controller data requires type A.

Display for show of measurements




EKA 163

Display for show of measurements and operating buttons for setting of the controllers functions



EKA 164

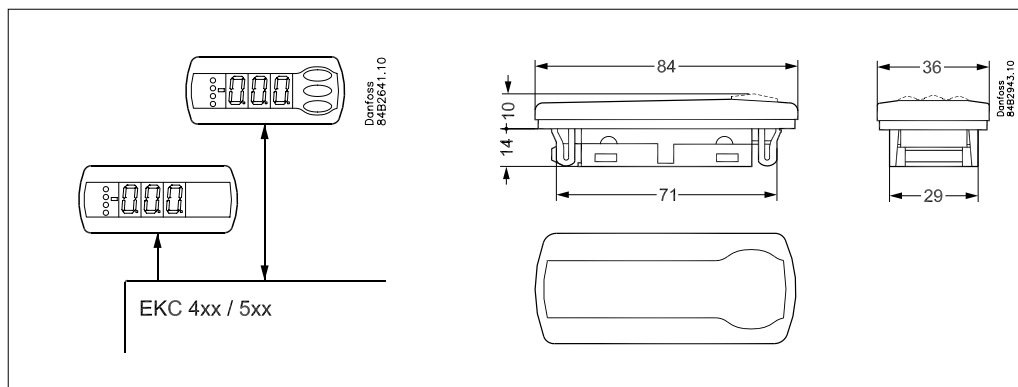

Technical data

Supply	12 V +/-15% (from controller)	
Display/operation	Readout accuracy in measuring range: 0.1°C EKA 163, LED, 3-digits EKA 164, LED, -digits, operation buttons	
Electrical connection	EKA 163A EKA 164A	Via screw terminals
	EKA 163B EKA 164B	Via plug
Communication	A-Version	RS 485* and TTL
	B-Version	TTL
Environments	-10 - 55°C, during operation	
	-40 - 70°C, during transport	
	20 - 80% Rh, non condensing	
	No shock influence / no vibrations	
Enclosure	From back	IP 20
Front mounting	EKA 163 EKA 164	IP 65

* The installation of data communication must keep the requirements which are described in literature no. RC8AC

Ordering

Description		Type	Code no.
Display unit	Screw terminals	EKA 163A	084B8562
	With plug	EKA 163B	084B8574
Display unit with operation buttons	Screw terminals	EKA 164A	084B8563
	With plug	EKA 164B	084B8575
Cable for display unit (2 m w/each)	1		084B7298
	24		084B7179
Cable for display unit (6 m w/plug)	1		084B7299
	24		084B7097
Cable for display unit (3 m w/plug)	24		084B7099
Cable for display unit (9 m w/plug)	24		084B7630

See also the connection option for the actual controller

Below is a list of articles with direct links to our shop Electric Automation Network where you can see:

- Quote per purchase volume in real time.
- Online documentation and datasheets of all products.
- Estimated delivery time enquiry in real time.
- Logistics systems for the shipment of materials almost anywhere in the world.
- Purchasing management, order record and tracking of shipments.

To access the product, click on the green button.

Product	Code	Reference	Product link
Cable 2m, EKA Displays,I-pack	084B7179		Buy on EAN
Cable 6m, EKA displays, I-Pack	084B7097		Buy on EAN
EKA 163B, Remote Display	084B8574		Buy on EAN
Cable 3m, EKA Displays , I-pack	084B7099		Buy on EAN
Cable 6m, EKA displays, S/M-Pack	084B7299		Buy on EAN
Cable 2m, EKA displays, S/M-Pack	084B7298		Buy on EAN
EKA 164B, Display, Remote setting	084B8575		Buy on EAN
EKA 163A, Display, Universal	084B8562		Buy on EAN
EKA 164A, Display, Universal settings	084B8563		Buy on EAN