

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



D-SUB connector, 9-pos. female connector, axial version with two cable entries, bus system: CAN, CANopen, SafetyBUS p; pin assignment: 2, 3, 7; screw connection terminal blocks

Product description

The SUBCON-PLUS-CAN/... D-SUB series is specifically designed for use in CAN systems. Under field conditions, it enables the quick and easy connection of the incoming and outgoing bus line. The terminating resistor is already integrated in all versions. It can be connected externally by means of a slide switch. At the same time, the outgoing bus segment is switched off. This makes it easy to start up segment by segment while incorrect terminations are avoided.

Your advantages

- Separate terminal blocks for bus cables
- Segment-by-segment startup
- High transmission speed
- Assembly under field conditions
- Flexibility in terms of cable entry selection
- High level of EMC
- Suitable for bus cables according to CiA Draft Recommendation 303-1 with an outside diameter of 8 mm
- Termination resistor can be connected

Commercial data

| | |
|--------------------------------------|---------------|
| Item number | 2306566 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN10 |
| Product key | DNC541 |
| GTIN | 4017918962906 |
| Weight per piece (including packing) | 53.6 g |
| Weight per piece (excluding packing) | 38.8 g |
| Customs tariff number | 85366990 |
| Country of origin | DE |

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

Technical data

Notes

Note on application

| | |
|---------------------|-------------------------|
| Note on application | Only for industrial use |
|---------------------|-------------------------|

Utilization restriction

| | |
|------------|---|
| CCCex note | Use in potentially explosive areas is not permitted in China. |
|------------|---|

Product properties

| | |
|----------------|--|
| Product type | Data plug |
| MTTF | 6706 Years (SN 29500 standard, temperature 25°C, operating cycle 21%) |
| | 1817 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%) |
| | 155 Years (SN 29500 standard, temperature 40°C, operating cycle 100%) |
| Pin assignment | 2, 3, 7 |

Electrical properties

| | |
|-----------------------|--------|
| Nominal voltage U_N | 5 V |
| Nominal current I_N | 100 mA |

Connection data

| | |
|-------------------|------------|
| Tightening torque | ... 0.4 Nm |
|-------------------|------------|

D-SUB connection

| | |
|-------------------|--------------|
| Connection method | D-SUB socket |
|-------------------|--------------|

PCB connection

| | |
|--|----------------------|
| Connection method | Screw connection |
| Stripping length | 5 mm |
| Conductor cross section, rigid min. | 0.14 mm ² |
| Conductor cross section, rigid max. | 0.5 mm ² |
| Conductor cross section flexible min. | 0.14 mm ² |
| Conductor cross section flexible max. | 0.5 mm ² |
| Single-wire/terminal point, rigid AWG min. | 26 |
| Single-wire/terminal point, rigid AWG max. | 20 |
| Min. AWG conductor cross section, flexible | 26 |
| Max. AWG conductor cross section, flexible | 20 |

Interfaces

| | |
|------------|---------------------------|
| Bus system | CAN, CANopen, SafetyBus-P |
| Signal | CAN |
| | CANopen® |

SUBCON-PLUS-CAN/AX - D-SUB bus connector




2306566

<https://www.phoenixcontact.com/us/products/2306566>

| | |
|--|-------------|
| | SafetyBUS p |
|--|-------------|

Dimensions

| | |
|---------------------|--|
| Dimensional drawing |  |
| Width | 17 mm |
| Height | 31.5 mm |
| Length | 58.2 mm |

Material specifications

| | |
|--------------------|--------------------|
| Material (Housing) | ABS (metal-plated) |
|--------------------|--------------------|

Cable/line

| | |
|-------------------------|---------------------------------------|
| External cable diameter | 7.6 mm ... 8.4 mm (Incoming bus line) |
|-------------------------|---------------------------------------|

Mechanical properties

| | |
|-----------------------------|-------|
| Mechanical data | |
| Insertion/withdrawal cycles | > 200 |

Mechanical tests

| | |
|--|---|
| Vibration resistance in accordance with EN 60068-2-6/IEC 60068-2-6 | Vibration (operation): 5g, 10...150 Hz, 2.5 h, in XYZ direction |
| Shock in accordance with EN 60068-2-27/IEC 60068-2-27 | Shock (operation): 15g, 11 ms period, half-sine shock pulse |

Environmental and real-life conditions

| | |
|--|--|
| Ambient conditions | |
| Degree of protection | IP40 |
| Ambient temperature (operation) | -20 °C ... 75 °C |
| Ambient temperature (storage/transport) | -25 °C ... 80 °C |
| Altitude | ≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation) |
| Permissible humidity (operation) | 10 % ... 95 % (non-condensing) |
| Permissible humidity (storage/transport) | 5 % ... 95 % (non-condensing) |

Approvals

| | |
|----------------|---------------------------|
| ATEX | |
| Identification | Ex II 3 G Ex ec IIC T4 Gc |
| Certificate | PxCIF14ATEX2744694X |

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

| | |
|--------------------|---|
| Note | Please follow the special installation instructions in the documentation! |
| Corrosive gas test | |
| Identification | ISA-S71.04-1985 G3 Harsh Group A |

Standards and regulations

| | |
|---|--------------------|
| Free from substances that could impair the application of coating | VDMA 24364:2018-05 |
|---|--------------------|

SUBCON-PLUS-CAN/AX - D-SUB bus connector


2306566

<https://www.phoenixcontact.com/us/products/2306566>




Drawings

Dimensional drawing

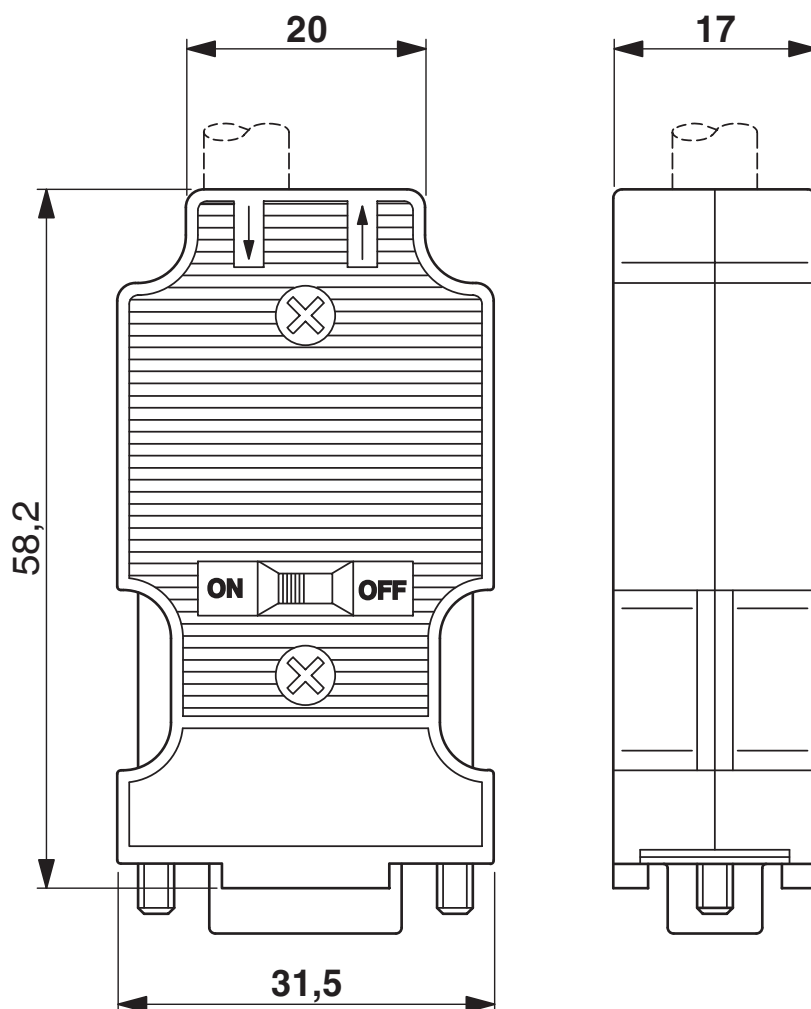

Dimensional drawing

Schematic diagram

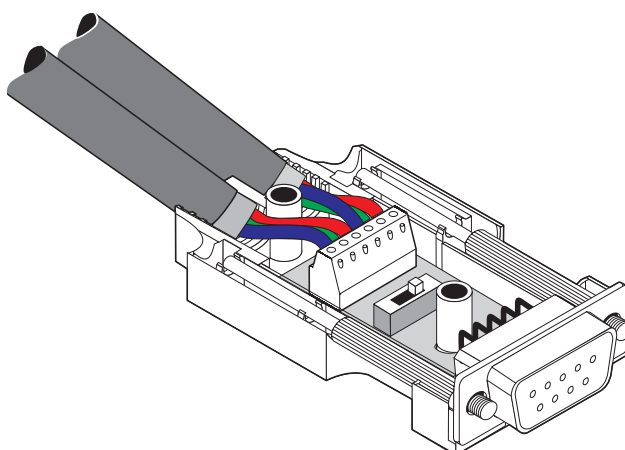

Connection of the cables


SUBCON-PLUS-CAN/AX - D-SUB bus connector

2306566

<https://www.phoenixcontact.com/us/products/2306566>




Schematic diagram

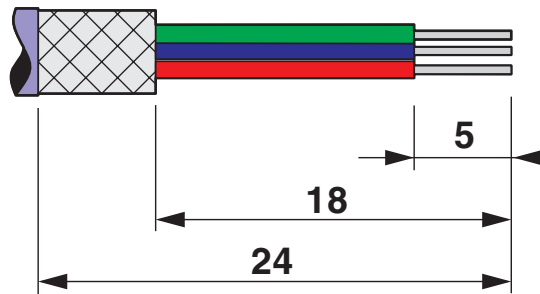

Stripping specifications

Circuit diagram

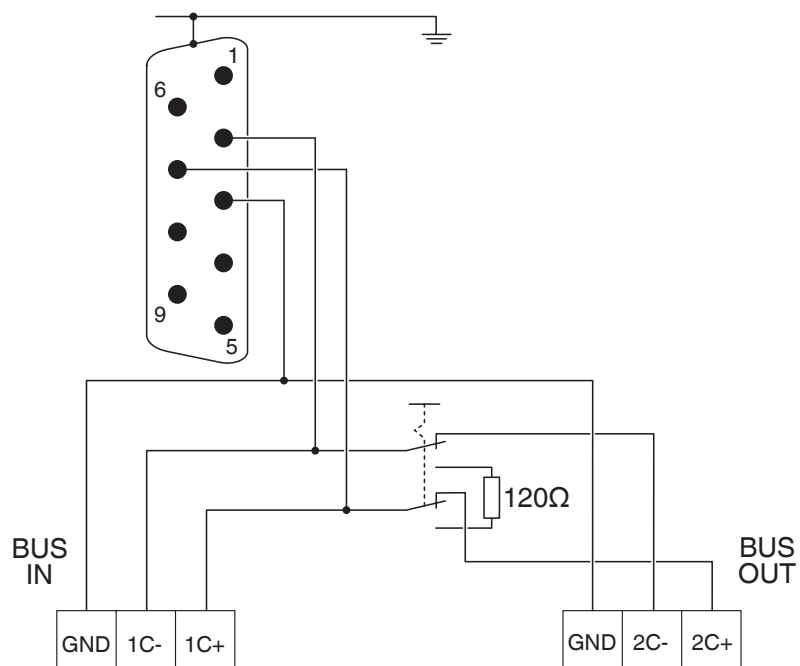

Block diagram

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2306566>



cUL Recognized
Approval ID: E238705



UL Recognized
Approval ID: E238705

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-13.0 | 27440302 |
| ECLASS-15.0 | 27440322 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001132 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

SUBCON-PLUS-CAN/AX - D-SUB bus connector



2306566

<https://www.phoenixcontact.com/us/products/2306566>

Environmental product compliance

EU RoHS

| | |
|---|--------------------|
| Fulfills EU RoHS substance requirements | Yes, No exemptions |
|---|--------------------|

China RoHS

| | |
|--|---|
| Environment friendly use period (EFUP) | EFUP-50 |
| | An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. |

EU REACH SVHC

| | |
|-------------------------------------|----------------------------|
| REACH candidate substance (CAS No.) | No substance above 0.1 wt% |
|-------------------------------------|----------------------------|

EF3.0 Climate Change

| | |
|---------|---------------|
| CO2e kg | 1.062 kg CO2e |
|---------|---------------|

Phoenix Contact 2025 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com